

Type Test Report

based on Regulation (EU) No 305/2011



Notification No.: 1008

Test Report No.:	28240340 001	Order No.:	93356030	Page 1 / 3
Client:	JIANGSU ZHONGTIAN TECHNOLOGY CO., LTD. No.1 Zhongtian Road, Hekou Town, Rudong County, 226463 Jiangsu Province, CHINA			
Test item:	Optical Fiber Cable			
[REDACTED]				
[REDACTED]				
[REDACTED]				

"1+" or "3"

manufacturing plant:	No.1 Zhongtian Road, Hekou Town, Rudong County, 226463 Jiangsu Province, CHINA		
Identification:	ZTT 0959	Serial No.:	-
Receipt No.:	A000170070-002	Date of receipt:	2017.07.31.
Testing location:	TÜV Rheinland InterCert Kft. Termék üzletág Villamos laboratórium H-1132 Budapest, Váci út 48/A-B, Hungary		
Test specification:	EN 60332-1-2:2004 + A1:2015		

Harmonised standard: EN 50575:2014 + A1:2016

Classification standard: EN 13501-6:2014

Throughout this report a comma is used as the decimal separator.


Abbreviations: ok / P = passed
fail / F = failed
n.a. / N/A = not applicable
data / D = publication of data

This test report relates to the a. m. test item. Without permission of the test center this test report is not permitted to be duplicated in extracts.

TÜV Rheinland InterCert Kft. – H-1132 Budapest, Váci út 48/A-B
tel.: +36/1/4611150; fax: +36/1/4611199; e-mail: tuv@hu.tuv.com – honlap: www.tuv.hu

EN 60332-1-2			
Clause	Requirement + Test	Result - Remark	Verdict
ZTT GYFJH-2F 7.0mm (ZTT 0959)			
5	Procedure		
	Sample length (600 ± 25 mm).....:	615	P
	Approx. outer diameter (mm).....:	7,0	
	Flame application time (s).....:	60	P
6	Evaluation of test results		
	Not damaged area from lower edge of the top support (min. 50 mm).....:	366	P
	Damaged area from lower edge of the top support (max. 540 mm).....:	498	P
	Flame spread H (max. 425 mm).....:	132	P

Test Type:	Test for vertical flame propagation for a single insulated wire or cable 1 kW pre-mixed flame
Standard:	EN 50575:2014 + A1:2016, EN 13501-6:2014 EN 60332-1-2:2004 + A1:2015. EN 60332-1-1:2004 + A1:2015
Cable type:	ZTT GYFJH-2F 7.0mm (ZTT 0959)
Marking:	ZTT GYFJH-2F 7.0mm Optical Fiber Cable ZTT0959 2017/06/24 0029M
No. of samples:	1
Ambient temperature:	26,5 °C
Date of test:	2017.08.07.
Classification according to EN 13501-6:	E_{ca}

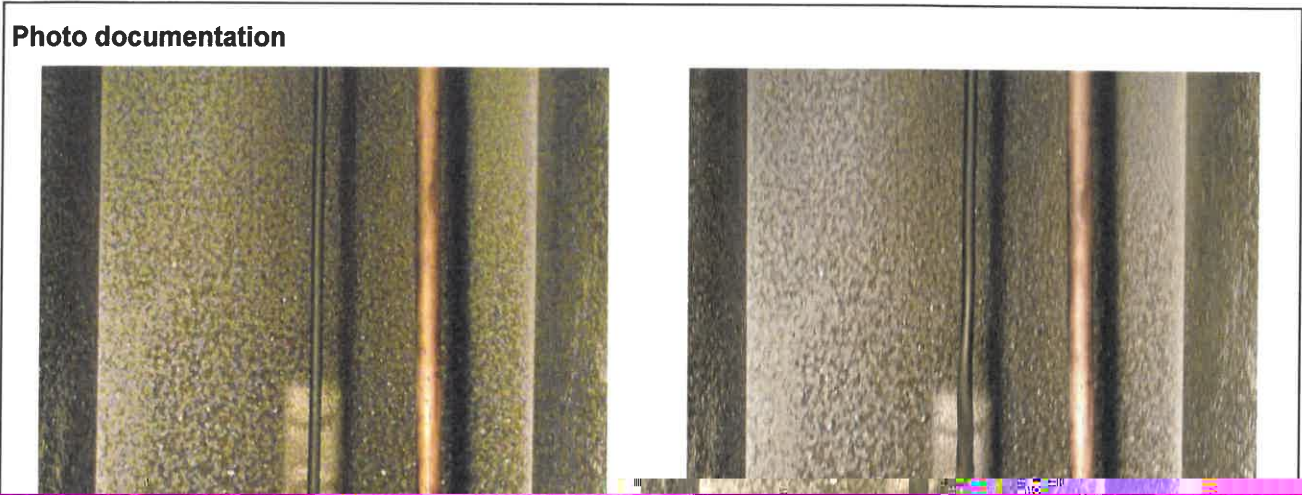

Before test

After test

Measuring equipment list

Device	Manufacturer	Type	Identification No.	Next calibration
Measuring tape	Stabila	BM 30W	503509	2019.09.21.
Stop-watch	Helvetia	S001	502911	2017.10.25.
Digital caliper	Mitutoyo	CD-15B	0556014003	2018.01.03.
Digital temperature and humidity meter	Testo	testo 635	023302	2018.01.24.
1 kW pre-mixed burner	MEEI	-	01629026	2018.03.14

-END OF TEST REPORT-